
# **WESTERBEKE** D-NET<sup>TM</sup> DIESEL GENERATOR

## **15.0 EDT** 60Hz **12.0 EDT** 50Hz

# Available fully networked to NMEA 2000<sup>®</sup>

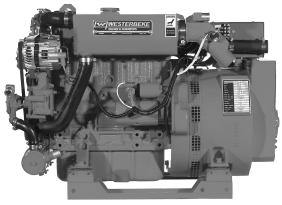

15.0/12.0 EDT Marine Diesel Generator

#### The First Electronic Diesel Generators Available NMEA 2000<sup>®</sup> Certified


Westerbeke, the **first** company to bring constant speed **EFI** generators and **Safe-CO<sup>™</sup>** generators to the marine market, introduces another first. The wave of the future, Westerbeke D-NET<sup>™</sup> electronic generators are offered with standard Westerlink<sup>™</sup> or optional NMEA 2000<sup>®</sup> compliant databus communication. NMEA 2000<sup>®</sup> is a network for shipboard communications developed under National Marine Electronics Association (NMEA) standards. <u>NMEA 2000<sup>®</sup> generators, combined with other certified components, allow boat builders and their customers to significantly reduce the cost, weight and space normally required to run cables throughout the vessel. All certified components freely communicate and are linked to just one NMEA 2000<sup>®</sup> cable using "T" connections that simplify networking.</u>

#### **Information At Your Fingertips**

All Westerbeke D-NET<sup>™</sup> generators have available digital controls offering simplified and easy to understand information on operational status and, if necessary, system diagnostics. Westerbeke also features "at a glance" illuminated lights indicating proper operation. They monitor battery voltage, generator voltage, generator frequency, oil pressure, coolant and exhaust temperature. All this information may be viewed from a distance—all green lights indicate referenced systems are functioning properly. Further details are available on the screen display. The user may conveniently scroll for operational or diagnostic information without encountering "codes". Westerbeke uses text so the user does not have to refer to a manual to decipher numeric information.

#### **Quiet, Slow-Speed Digital Operation**

Operating at 1800-rpm with a newly designed, tuned air intake silencer and 4-cylinder engine, the 15.0 EDT generator runs smooth and quiet. Augmenting this desired effect is the electronic governing that virtually eliminates "droop" when load is applied. Include the optional Sound Guard SST with high quality stainless steel base and frame with stylish powder coated aluminum panels and you have a generator as attractive as it is quiet.

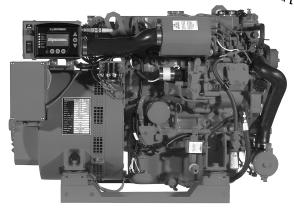

15.0/12.0 EDT Marine Diesel Generator

#### Standard Features

- Digital display and diagnostics panel
- Electronic governing
- Safety shut-downs: overspeed, underspeed, low oil pressure, high exhaust and high coolant temperature
- AC circuit breaker
- 50 amp battery charging alternator
- Power take-off interface
- Self-bleeding fuel system
- Fresh water cooling and coolant recovery tank
- 45 degree water injected exhaust elbow
- Gear driven raw water pump
   Tumor driven raw water pump
- Tuned air intake silencer
   Anti-vibration mounts fail cafe with
- Anti-vibration mounts fail safe rubber type
  Lube oil drain hose and drip tray
- Lube on arain hose and
   Oil fill top and side
- Oil fill top and s
   Belt guard
- Deil guard
   Operatore' Mai
- Operators' Manual and parts list
- 5-year limited warranty
- Complies with U.S. EPA regulations

### Digital Display











#### **Generator Design**

DESIGN: Brushless, four pole, revolving, power take-off. VOLTAGE REGULATION: Standard +/- 5% no load to full load. FREQUENCY REGULATION: .5 Hz (.60%) no load to full load. INSULATION: Class "H", as defined by NEMA MG1-1.65.

TEMPERATURE RISE: Within NEMA MG1-22.40 definition when operating at full load.

**COOLING:** Cast centrifugal blower, direct connected. **ELECTROMAGNETIC INTERFERENCE LEVEL:** Exceeds requirements for most marine radio-telephones and standard TVs.

Electrical Characteristics				Ratings		Engine			
Hertz	Phase	Wire	Power Factor	KW	RPM	Start			
60	1	4	1.0	15.0	1800	Remote			
50	1	4	1.0	12.0	1500	Remote			
-	Hertz 60	Hertz Phase 60 1	HertzPhaseWire6014	HertzPhaseWirePower Factor60141.0	HertzPhaseWirePower FactorKW60141.015.0	HertzPhaseWirePower FactorKWRPM60141.015.01800			

WESTERBEKE

Engines & Generators

\* Adjustable to 50 or 60 Hertz. Three phase units, 50 and 60 Hertz, are available at these ratings.

**Dimensions** 

AC OUTLET CIRCUIT BREAKER

BRUSHLESS

- 6.7 [170]

4.2 [106]

 $\cap$ 

Specifications		Lubricant capacity				
Number of cylinders	4 Cylinder vertical in-line	Starting motor	12 volt, solenoid, actuated shift			
Туре	4 cycle	Alternator	50 amps			
Displacement	107.27 cu. in. (1.758 liter)	Cold cranking amp				
Bore and stroke	3.07" x 3.62" (78 mm x 92 mm)	Electrical system	12 volts DC, negative ground			
Compression ratio	22:1	Construction	I – Engine Components			
Rated rpm @ 60/50 Hz	1800/1500	Cylinder head	Cast Iron			
HP @ 1800/1500 rpm	25.0/22.0	Cylinder block	Cast Iron			
Maximum angle of continuous operation Not to exceed 15° in all directions		Crankshaft	Forged crankshaft, five main bearings			
Exhaust elbow connection	2" OD (50.8mm)	Valves	Overhead, rotating type			
Sea water connection	1" OD (25.4mm)	Fuel System	Self-bleeding			
Dry weight	588 lbs. (267 kilos)	Intake system	Tuned intake silencer			
Combustion system	Swirl type	for maximum noise reduction				
Aspiration	Naturally aspirated	Cooling system Fresh water-cooled with heat exchange				
Lubrication system	Forced lubrication by gear	Exhaust manifold	Cast aluminum, fresh water-cooled			
Cooling system	8 quarts (7.6 liters)	<b>Optional Equ</b>	lipment			
Starting aid	12 volt sheathed type glow plug	NMEA 2000 <sup>®</sup> compliant databus communication				
Full load fuel consumption@1800rpm	1.47 GPH (5.6 LPH) (approx.)	Remote digital display (NMEA 2000 <sup>®</sup> )				
Full load fuel consumption@1500rpm	1.12 GPH (4.2 LPH) (approx.)	Remote digital display (Westerlink™)				
Fuel injection pump	Bosch type, with solenoid shutoff	Remote start/stop for use with Westerlink™ or NMEA 2000 <sup>®</sup> version				
Governor	Electronic	Sound Guard SST (PN 53463)				
Injectors	Throttle type	Hydro-hush muffler and fittings; fuel water separator				
Fuel Filter	Primary and secondary replaceable type	Anti-siphon valve with 1" inch stainless steel loop				
Fuel transfer pump	12 volt electric type	Ship-to-shore switch; power take-off adapter				
Fuel supply and return piping 1/4" ID (6.35 mm) minimum		"A" on board spare parts kit; "B" extended cruising spare parts kit				
	3/8" ID (9.53 mm) maximum	Technical manual				
Lube oil filter	Full flow, spin-on element	Generator set available painted white upon request (standard red)				

19.1 [485]

9.9 [250]

7.2 [183]

14.4 [366]

17.9 [455]

15.1 [382]

8.9 [227]

24.0 [609]

-PLASTIC DRIP TRAY

A CRAW WATER DISCHARGE 1.0 [25.4] I.D.HOSE ON FAR SIDE

-MTG CENTER FOR 1/2" BOLTS


 $\cap$ 

#### Inches (millimeters) 34.6 [880] .6 [15] FUE WATER INJECTION FITTING 1.0 [25.4] I.D.HOSE -INSTRUMENT PANEL EXHAUST OUTLET 2.0 [50.8] I.D.HOSE

FUEL INLET CONNECTION 1/8-27 NPT (FEMALE)

12.3 [311]

20.6 [522]

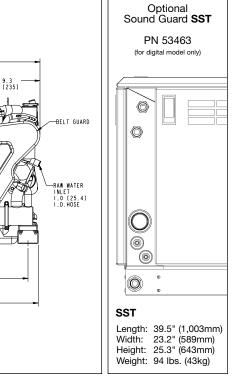

Westerbeke Corp., Myles Standish Industrial Park, 150 John Hancock Road, Taunton, MA 02780-7319, U.S.A. • Telephone: (508) 823-7677 • Fax: (508) 884-9688 • Website: www.westerbeke.com Specifications Subject to Change without Notice. FC-3/15