
## **WESTERBEKE** D-NET<sup>TM</sup> DIESEL GENERATOR

### 5.5 EDC 60Hz 5.0 EDC 50Hz

# Available fully networked to NMEA 2000®

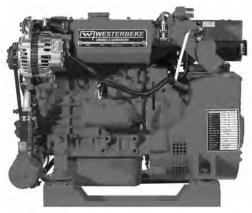

5.5/5.0 EDC Marine Diesel Generator

#### The First Electronic Diesel Generators Available NMEA 2000<sup>®</sup> Certified


Westerbeke, the first company to bring constant speed EFI low-CO generators to the marine market, introduces another first. The wave of the future, Westerbeke D-NET<sup>™</sup> electronic generators are offered with standard Westerlink<sup>™</sup> or optional NMEA 2000<sup>®</sup> compliant databus communication. NMEA 2000<sup>®</sup> is a network for shipboard communications developed under National Marine Electronics Association (NMEA) standards. NMEA 2000<sup>®</sup> generators, combined with other certified components, allow boat builders and their customers to significantly reduce the cost, weight and space normally required to run cables throughout the vessel. All certified components freely communicate and are linked to just one NMEA 2000<sup>®</sup> cable using "T" connections that simplify networking.

#### **Information At Your Fingertips**

All Westerbeke D-NET<sup>™</sup> generators have available digital controls offering simplified and easy to understand information on operational status and, if necessary, system diagnostics. Westerbeke also features "at a glance" illuminated lights indicating proper operation. They monitor battery voltage, generator voltage, generator frequency, oil pressure, coolant and exhaust temperature. All this information may be viewed from a distance—all green lights indicate referenced systems are functioning properly. Further details are available on the screen display. The user may conveniently scroll for operational or diagnostic information without encountering "codes". Westerbeke uses text so the user does not have to refer to a manual to decipher numeric information.

#### **Quiet, Slow-Speed Digital Operation**

Operating at 1800-rpm with a newly designed, tuned air intake silencer and 3-cylinder engine, the 5.5 EDC generator runs smooth and quiet. Augmenting this desired effect is the electronic governing that virtually eliminates "droop" when load is applied. Include the optional Sound Guard SST with high quality stainless steel base and frame with stylish powder coated aluminum panels and you have a generator as attractive as it is quiet.

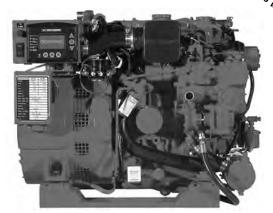

5.5/5.0 EDC Marine Diesel Generator

#### Standard Features

- Digital display and diagnostics panel
- Electronic governing
- Safety shut-downs: overspeed, underspeed, low oil pressure, high exhaust and high coolant temperature
- AC circuit breaker
- 50 amp battery charging alternator
- Power take-off interface
- Self-bleeding fuel system
- Fresh water cooling and coolant recovery tank
- 45 degree water injected exhaust elbow
- Gear driven raw water pump
   Tuped air intake silencer
- Tuned air intake silencer
   Anti-vibration mounter fail acts with
- Anti-vibration mounts fail safe rubber type
  Lube oil drain hose and drip tray
- Lube oil drain hose and
   Oil fill top and side
- Oil fill top and
  Belt guard
- Operators' Manual and parts list
- 5-year limited warranty
- Complies with U.S. EPA regulations

### Digital Display





D-NET<sup>™</sup> DIESEL GENERATOR



WESTERBEKE Engines & Generators

#### **Generator Design**

**DESIGN:** Brushless, four pole, revolving, power take-off. **VOLTAGE REGULATION:** Standard +/- 5% no load to full load. **FREQUENCY REGULATION:** .5 Hz (.60%) no load to full load. **INSULATION:** Class "H", as defined by NEMA MG1-1.65. **TEMPERATURE RISE:** Within NEMA MG1-22.40 definition when operating at full load.

COOLING: Cast centrifugal blower, direct connected. ELECTROMAGNETIC INTERFERENCE LEVEL: Exceeds requirements for most marine radio-telephones and standard TVs.


	Electrical Characteristics					Ratings		Engine	
Model	Volts	Amps	Hertz	Phase	Wire	Power Factor	KW	RPM	Start
5.5 EDC-614*	120	45.8	60	1	4	1.0	5.5	1800	Remote
5.0 EDC-514*	230	21.7	50	1	4	1.0	5.0	1500	Remote

WESTERBEKE

Engines & Generators

\* Adjustable to 50 or 60 Hertz.

Spacifications		1	Lubricant capacity		2.9 guarta (2.6 litara)			
Specifications			Starting motor		3.8 quarts (3.6 liters) 12 volt, solenoid, actuated shift			
Number of cylinders	3 Cylinder vertical in-line		Alternator					
Туре	4 cycle				50 amps			
Displacement	58.09 cu. in. (.952 liter)		Cold cranking amps		190 12 volts DC, negative ground			
Bore and stroke	2.99" x 2.76" (75.9 mm x 70.0 mm)	ļ	Electrical system		÷ 6 6			
Compression ratio	23:1		Construction	<ul> <li>Engine</li> </ul>	e Components			
Rated rpm @ 60/50 Hz	1800/1500		Cylinder head	Cast Iron				
HP @ 1800/1500 rpm	11/9		Cylinder block	Cast Iron				
Maximum angle of continuous operation	Not to exceed 25° in all directions		Crankshaft	Forged crar	nkshaft, four main bearings			
Exhaust elbow connection	2" OD (50.8mm)		Valves	Overhead v	alves, rotating type			
Sea water connection	1" OD (25.4mm)		Fuel System	Self-bleeding				
Dry weight	373 lbs. (169 kilos)		Intake system	Tuned intak	e silencer			
Combustion system	Swirl type			for maximur	n noise reduction			
Aspiration	Naturally aspirated		Cooling system	Fresh water	-cooled with heat exchanger			
Lubrication system	Forced lubrication by gear pump		Exhaust manifold	Cast alumin	um, fresh water-cooled			
Cooling system	4 quarts (3.78 liters)		<b>Optional Equi</b>	pment				
Starting aid	12 volt sheathed type glow plug		NMEA 2000 <sup>®</sup> compliant databus communication					
Full load fuel consumption @1800 rpm	0.61 GPH (2.3 LPH) (approx.)		Remote digital display (NMEA 2000®)					
Full load fuel consumption @1500 rpm			Remote digital display (Westerlink™)					
Fuel injection pump	Bosch type, with solenoid shutoff		Remote start/stop for use with Westerlink <sup>™</sup> or NMEA 2000 <sup>®</sup> version					
Governor	Electronic		Sound Guard SST (PN 52709)					
Injectors	Throttle type		Hydro-hush muffler and fittings; fuel water separator					
Fuel Filter	Secondary, replaceable type		Anti-siphon valve with 1" inch stainless steel loop					
Fuel transfer pump	12 volt electric type		Ship-to-shore switch; power take-off adapter					
Fuel supply and return piping	1/4" ID (6.35 mm) minimum		"A" on board spare parts kit; "B" extended cruising spare parts kit					
	3/8" ID (9.53 mm) maximum		Technical manual		<b>.</b>			
Lube oil filter	Lube oil filter Full flow, spin-on element		Generator set available painted white upon request (standard red)					

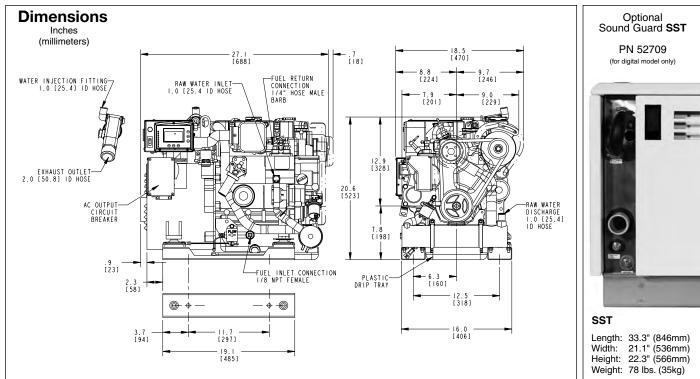

Westerbeke Corp., Myles Standish Industrial Park, 150 John Hancock Road, Taunton, MA 02780-7319, U.S.A. • Telephone: (508) 823-7677 • Fax: (508) 884-9688 • Website: www.westerbeke.com Specifications Subject to Change without Notice.